



Weight 55kg/m² **Module Width** 300 - 1800mm

Standard Module Height
600mm minimum,
(increasing increments
of 305mm)
Intermediate heights
are available

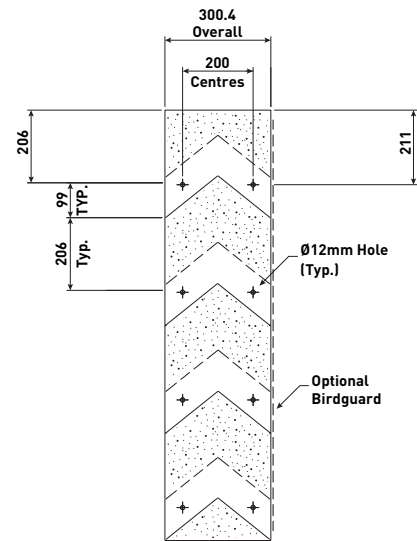


Acoustic Performance

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	-	7	13	13	18	21	20	21
Acoustic Rating	R_w 18dB / D_{new} 29dB							
For noise reduction, add 6dB to the above values								

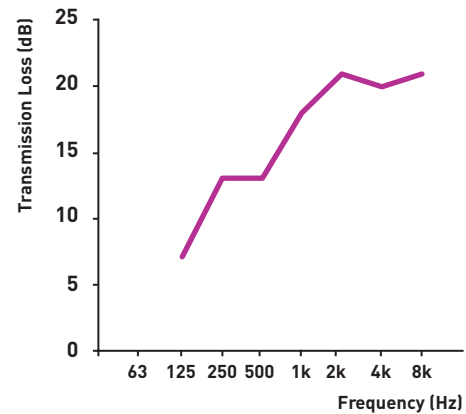

Aerodynamic Performance

Static Pressure Drop (N/m ²)	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	0.44	0.62	0.76	0.88	0.98	1.07	1.16	1.24	1.31	1.38
Nominal Free Area	32%* * Average over louvre depth									
Aerodynamic Coefficient	(k) 87.34									
Discharge Coefficient	0.107									

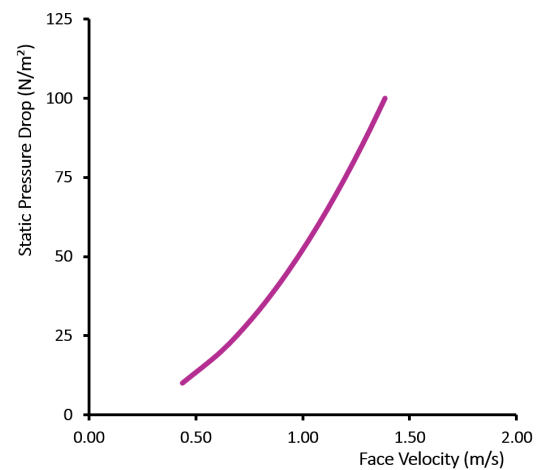

Pressure Drop = \dot{m}/Cd
 \dot{m} = mass flow
 Cd = Discharge Coefficient